


CYCLOJET INEX SERIES

(Small/Medium/Large)

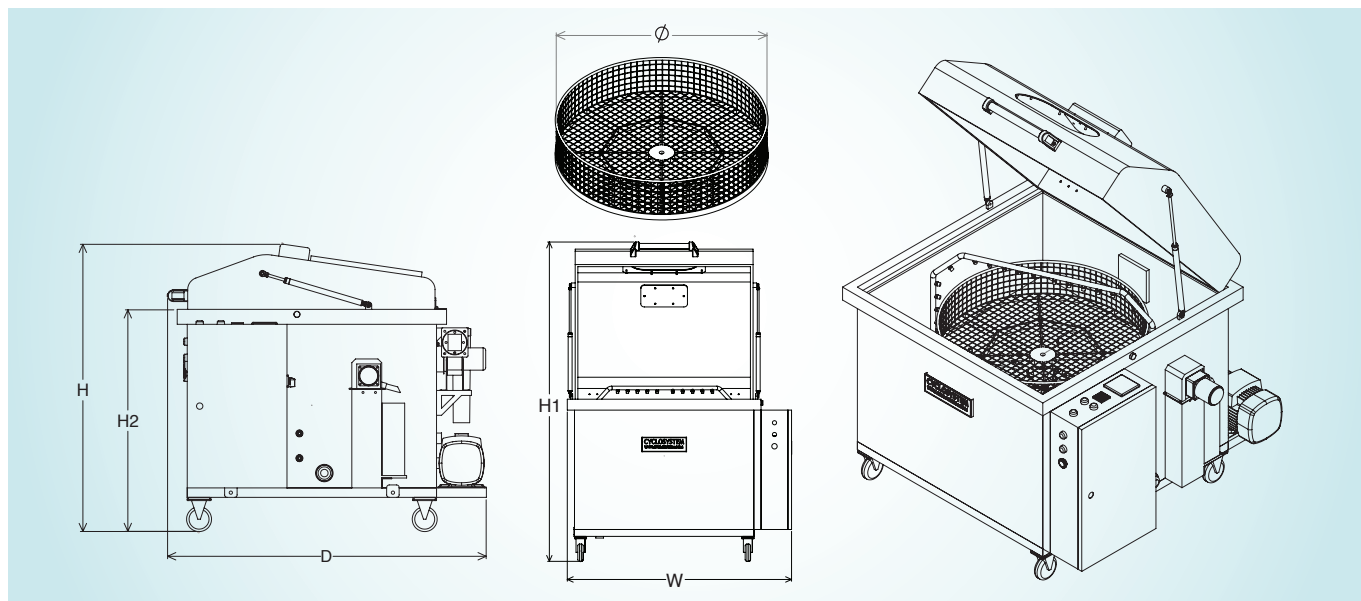

Technical Specifications

S/N	DESCRIPTIONS	SMALL	MEDIUM	LARGE
1.0	MODEL NO.	CJ-600S	CJ-800S	CJ-1000S
2.0	Washbasket			
2.1	Maximum Diameter (Ø) ^A	600 mm ^A	800 mm ^A	1000 mm ^A
2.2	Wash Height Clearance	450 mm	450 mm	450 mm
2.3	Maximum Load Capacity	50 Kg	75 Kg	100 Kg
3.0	Principal Dimensions			
3.1	Overall Width (W)	1050 mm	1250 mm	1450 mm
3.2	Overall Depth (D)	1050 mm	1250 mm	1450 mm
3.3	Overall Height (H)	1100 mm	1200 mm	1300 mm
3.4	Overall Open Height (H1)	1550 mm	1750 mm	1850 mm
3.5	Loading Height (H2)	900 mm	900 mm	900 mm
4.0	Other Specifications			
4.1	Reservoir Tank Capacity	120 L	200 L	280 L
4.2	Wash Pressure (Max)	4.0 Bar	4.0 Bar	4.0 Bar
4.3	Wash Capacity (Max)	80 Lpm	100 Lpm	150 Lpm
4.4	Heaters Capacity	3.0 Kw@3-Phase	6.0 Kw@3-Phase	9.0 Kw@3-Phase
4.5	Heat-Up Time (approx.)	60 ~ 90 mins	60 ~ 90 mins	60 ~ 90 mins
4.6	Wash Temperature (Max)	60 ~ 70 deg-C	60 ~ 70 deg-C	60 ~ 70 deg-C
4.7	Wash Duration (approx.)	15 ~ 30 mins	15 ~ 30 mins	15 ~ 30 mins
4.8	Exhaust Fan (Option)	2.0 m³/ min	3.0 m³/ min	5.0 m³/ min
4.9	Equipment Weight (Est.)	180 Kg	250 Kg	350 Kg
5.0	Utilities Requirements			
5.1	Electrical Supply ^B	380 ~ 400 Volts ^B	380 ~ 400 Volts ^B	380 ~ 400 Volts ^B
5.2	No. of Phase/ Frequency ^B	3-Phase/ 50 Hz ^B	3-Phase/ 50 Hz ^B	3-Phase/ 50 Hz ^B
5.3	Connected Load (Max)	6.0 Kw (TPN+E)	9.0 Kw (TPN+E)	12.0 Kw (TPN+E)
5.4	Exhaust Outlet Opening	Dia. 75 mm	Dia. 100 mm	Dia. 125 mm
5.5	Drainage Outlet	DN 25	DN 25	DN 25

Machine specifications are subject to change without prior notice.

NOTE: ^A All other sizes can be offered as an option.

^B All other electrical power supply can be offered as an option.